

# SfAR-1M-2DI2DO



## Modbus I/O Module

MODEL	DESCRIPTION
SfAR-1M-2DI2DO	Modbus I/O module with 2 digital inputs and 2 digital outputs



### APPLICATION AND USE

SfAR-1M-2DI2DO is a controller's I/O extension, which, thanks to its unique features, fits variety of applications, for example, measuring working time of devices or connecting valves without Modbus support into the Modbus network. The module has 2 digital inputs (DI) and 2 digital outputs (DO). Digital inputs can work as fast pulse counters with up to 1000 counts per sec, or timers measuring the ON state, and also offering a possibility to connect 2 encoders. Digital inputs support both PNP and NPN input types. Digital outputs are PNP transistor outputs sending voltage signals. All inputs and outputs are isolated from the logic with opto-isolators. A built-in RS485 interface allows an easy connection over Modbus RTU/ASCII protocol. A 32-bit ARM core processor provides fast processing and communication. The module is equipped with a set of LEDs used to indicate the status of I/Os, power supply, and RS485 communication.

Configuration of the module is carried out with our free software, the SfAR Configurator. A built-in mini USB allows for performing a primary configuration of the unit without additional power supply.

### FEATURES

- 2 opto-isolated digital inputs
- 2 opto-isolated digital outputs
- Each DI can work as a 32-bit pulse counter or time counter
- Support for encoder
- Built-in LEDs for device status indication
- Modbus RTU/ASCII communication
- Baud rate: 2400-115200 bps
- Up to 128 modules on the bus
- Built-in mini USB type B port for configuration
- Space-saving housing, DIN rail mounting

### TECHNICAL SPECIFICATION


DESCRIPTION		SfAR-1M-2DI2DO
Power supply	Voltage	10-38 V DC; 10-28 V AC
Digital input	Number of inputs	2
	Type	PNP or NPN transistor inputs Fast pulse counter up to 1 kHz Timer Encoder support
Digital output	Number of outputs	2
	Type	PNP transistor output
	Maximum current load	250 mA
	Maximum voltage load	55 V DC

The performances stated in this sheet can be modified without any prior notice.


DESCRIPTION		SfAR-1M-2DI2DO
TX	RS485 interface	Up to 128 devices
	Communication protocol	Modbus RTU/ASCII
	Ports	3-pin screw connector
	Baud rate	2400-115200
USB	mini USB	Type B, for configuration
Ingress protection	IP rating	IP 40 for indoor installation
Temperature	Storage	-40°C to +85°C (-40°F to +185°F)
	Operating	-10°C to +50°C (14°F to 122°F)
Humidity	Relative	5 to 95% RH (without condensation)
	Type	2-pin (power supply), 3-pin (RS485, I/O)
Screw connectors	Maximum cable size	2.5 mm <sup>2</sup> (18...12 AWG)
	Material	Self-extinguishing plastic (PC/ABS)
Housing	Cooling	Internal air circulation
	Mounting	DIN (DIN EN 50022 norm) 2 screw holders
Dimensions	Width	90.00 mm/3.54 in
	Length	56.40 mm/2.22 in
	Height	17.50 mm/0.69 in

## WIRING DIAGRAMS


### Power Supply

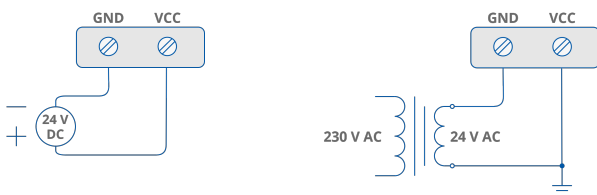


### Communication



### Digital Input

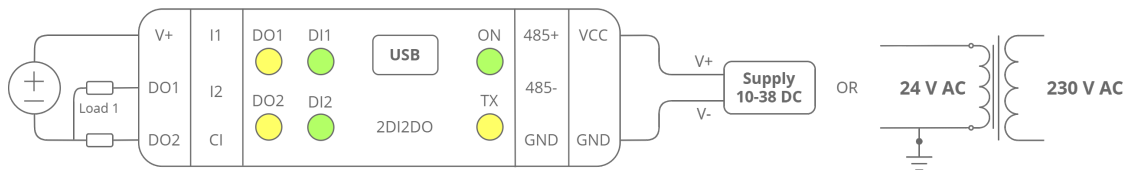

### Digital Output

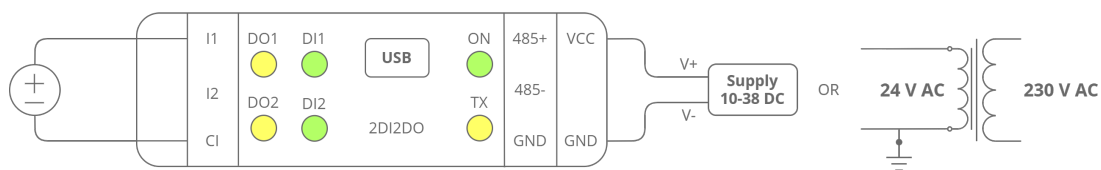

## APPLICATION EXAMPLE

### Automation of a control process




## DEDICATED SOFTWARE



SfAR Configurator - Windows-based freeware configuration tool made for Modbus I/O modules.

## DIMENSIONS [mm]

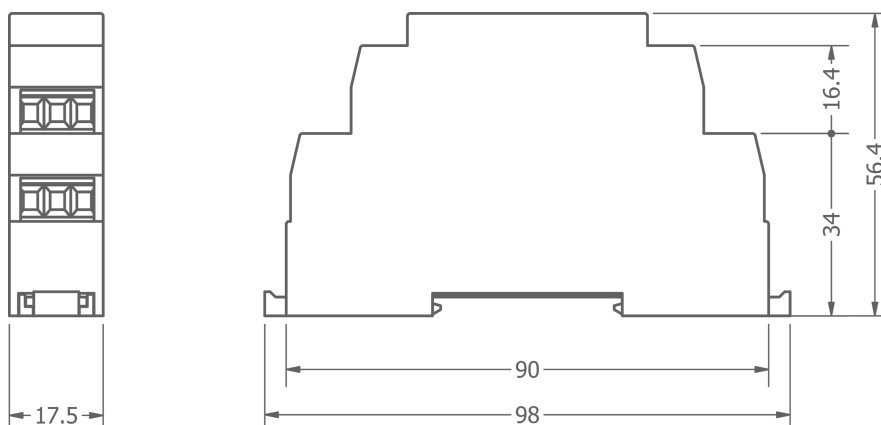

QUICKLINK SOLUTIONS S.r.l. | [info@qlsol.com](mailto:info@qlsol.com)

Sede operativa nord ovest: Via G. Matteotti 193-203, 21044 Cavaria con Premezzo (VA), Italy

Sede operativa nord est: Via F. Petrarca, 34, 35020 Albignasego (PD), Italy